




A subsidiary of **VINCI**
ENERGIES

Equilibrium in Technology

**WELL-PROVEN
DESIGN**

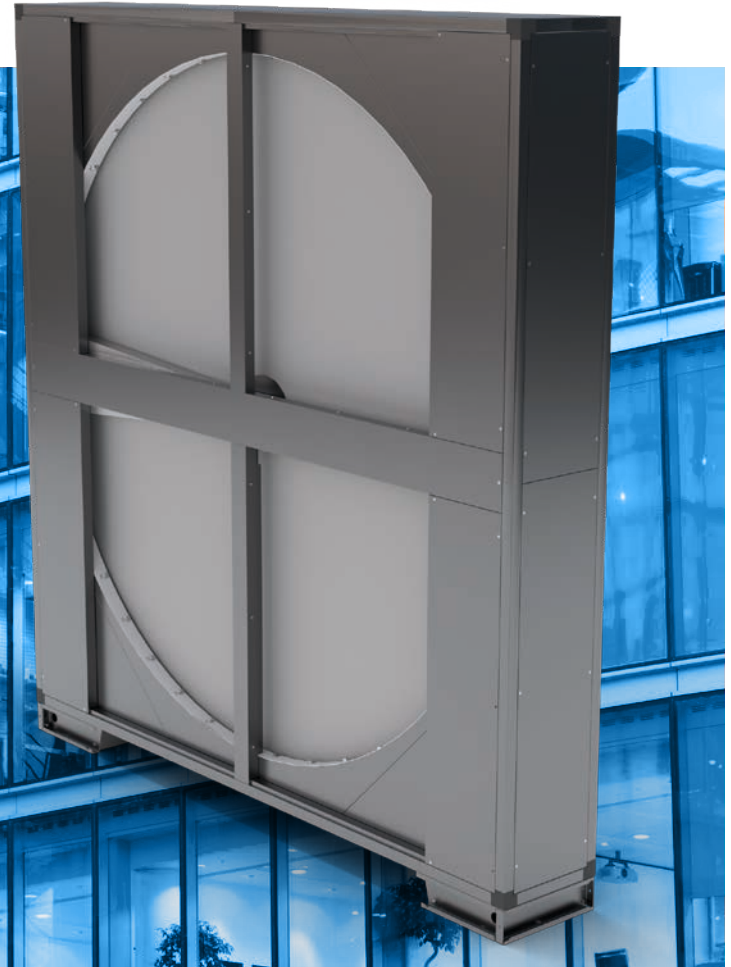

ASSEMBLED VERSION

Ideal design of a rotary heat exchanger for all applications that require higher rigidity and flexibility of construction.

The heat exchanger frame is made of hot-dip galvanized sectional bars interconnected by joining corners. The heat exchanger may be encased in a housing consisting of panels with excellent heat insulation parameters.

Assembled versions of the rotary heat exchanger are especially suitable as a stand-alone component of air-handling systems.



Main benefits

- rigidity of construction
- excellent heat insulation parameters with housing panels
- suitable as a stand-alone component of air-handling systems
- undivided as well as divided design
- optional bypass
- optional custom surface color

Construction


- exchanger design: divided / undivided
- air stream position: side-by-side / stacked
- standard operation in vertical position
- optional fully automatic cleaning system

Technical parameters

- for all types of rotors
- maximum rotor diameter 3800 mm
- may be fitted with insulation panels - thickness 25 mm, 50 mm (front and side panels)
- thermal transmittance coefficient pursuant to EN 1886/2007 - T2
- thermal bridge coefficient class pursuant to EN 1886/2007 - TB3 / TB2

Rotor sealing options

- contactless sealing - felt or labyrinth sealing with sealing efficiency of 98.5 %




Description	ØD [mm]	B **) [mm]	H **) [mm]	T **) [mm]	C [mm]	S [mm]	Design
Standard	700 - 2900	ØD +180	ØD +180	460	*)	46/67	Undivided
ST 200/ØD	3000 - 3800	ØD +260	ØD +260	505	*)	67/86	Divided

- ØD** rotor diameter (dimensions by 10 mm)
- B** rotary heat exchanger cabinet width
- H** rotary heat exchanger cabinet height
- T** rotary heat exchanger cabinet depth
- C** connecting size (for version with front panels)
- S** profile size

Note:

- rotary heat exchanger may be fitted with a supporting frame
- winding width 200 mm
- *) customized dimensions
- **) minimum dimensions (may be extended subject to customer-specific requirements)

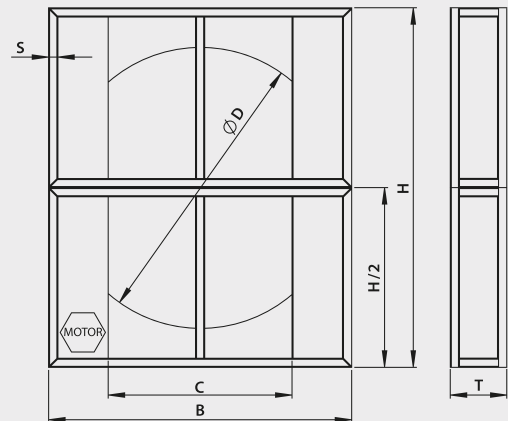

A subsidiary of **VINCI ENERGIES**

🏠 KASTT, spol. s r.o.
Jižní 870
500 03 Hradec Králové
Czech Republic

☎ +420 495 404 010
✉ info@kastt.cz

www.kastt.cz

